


名称	EM11 40形 W230 屋白色 3,200lmタイプ 防水	
型番	EM11SE-B4N32BF9-A	
光源	型番	-
	全光束	- [lm] -
保守率 (40,000h)	良い	0.88
	普通	0.86
	悪い	0.81
効率	上半球	1.0 [%]
	下半球	99.0 [%]
	全方向	100.0 [%]
器具光束	3,070 [lm]	

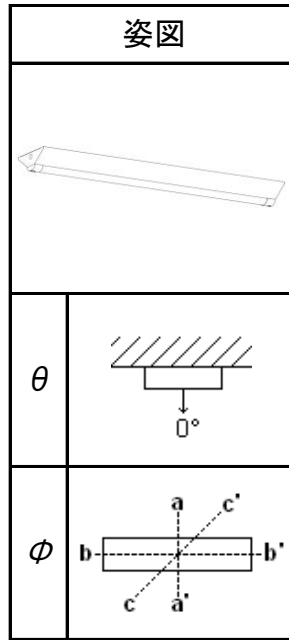


◎配光特性 [cd/1,000lm]

θ	ϕ	a-a'	b-b'	c-c'
0°		304	304	304
10°		300	297	299
20°		289	285	286
30°		267	260	262
40°		237	222	228
50°		200	176	187
60°		160	126	143
70°		120	79	101
80°		85	40	64
90°		55	12	35
100°		32	0	15
110°		17	0	0
120°		0	0	0
130°		0	0	0
140°		0	0	0
150°		0	0	0
160°		0	0	0
170°		0	0	0
180°		0	0	0


照明率表

反射率 (%)	天井		80						70						50				30		20	0		
	壁	床	70		50		30		70		50		30		50		30		30		10	0		
			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照明率 (×0.01)																						初期値	
0.6	60	56	46	43	37	36	58	54	45	43	36	35	43	41	35	34	34	34	34	29	27			
0.8	71	65	56	52	46	44	69	63	55	52	45	44	52	50	44	43	43	42	42	37	35			
1	79	71	64	60	55	52	76	69	63	59	54	51	60	57	52	50	50	49	43	41				
1.25	87	77	73	67	63	59	83	75	71	65	62	58	67	63	59	57	57	55	50	48				
1.5	92	81	79	72	69	64	89	79	77	71	68	64	73	68	65	62	62	60	55	53				
2	100	87	89	79	80	73	96	85	86	78	78	72	81	75	74	70	71	68	64	61				
2.5	106	91	95	84	87	79	101	89	92	83	85	77	87	80	81	75	77	73	69	67				
3	109	94	100	88	93	83	105	92	97	86	90	82	91	83	85	79	81	77	73	71				
4	114	97	107	92	100	88	109	95	103	91	97	87	96	88	91	84	86	82	78	76				
5	117	99	111	95	105	91	112	97	106	93	101	90	99	90	95	87	89	85	82	79				
10	123	103	119	101	116	99	118	101	115	99	112	97	106	96	104	94	97	92	89	86				

配光曲線 (cd/1000[lm])

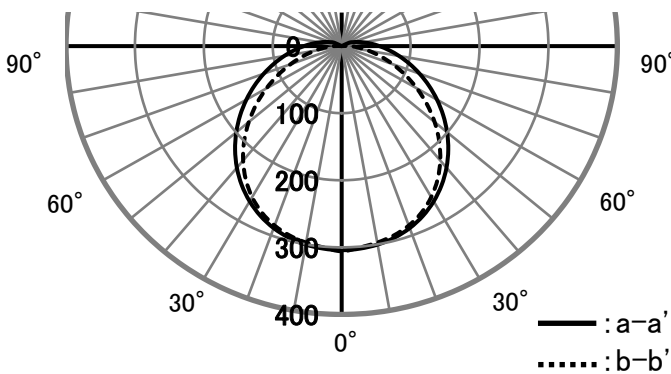

高さ(m) 直射水平面照度図 初期値

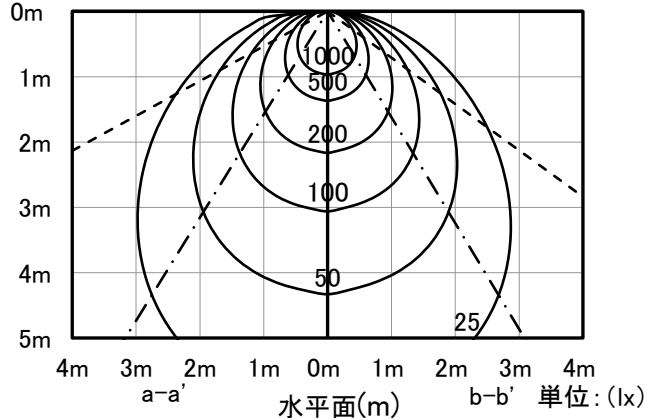

124°	1/2ビーム角---	109°
65°	1/2照度角---	63°