


名称	LEDダウンライト 埋込穴φ100 調光非対応 白色	
型名	EA5D-24-100W-40R1	
光源	型名	-
	全光束	- [lm] -
保守率	良い	0.63
	普通	0.60
	悪い	0.53
効率	上半球	0 [%]
	下半球	100 [%]
	全方向	100 [%]
器具光束	370 [lm]	

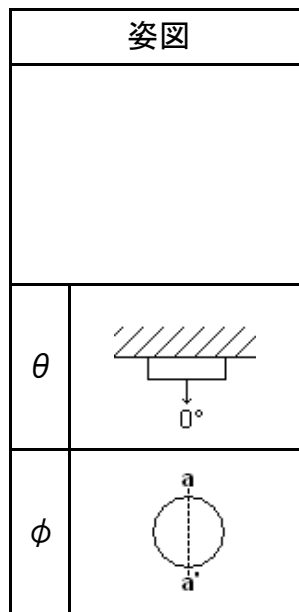


◎配光特性 [cd/1000lm]

θ	ϕ	a-a'	b-b'	c-c'
0°		816		
10°		724		
20°		522		
30°		338		
40°		224		
50°		151		
60°		97		
70°		57		
80°		22		
90°		0		
100°		0		
110°		0		
120°		0		
130°		0		
140°		0		
150°		0		
160°		0		
170°		0		
180°		0		


照明率表

反射率 (%)	天井	80						70						50				30		20		0		
		壁		70		50		30		70		50		30		50		30		30		10		0
室指数		床		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	0
		照明率 (×0.01) 初期値																						
0.6		72	67	59	57	52	50	71	66	59	56	51	50	57	55	51	50	50	49	45	45	44		
0.8		82	75	69	65	61	59	80	73	68	64	60	58	66	63	59	58	58	57	53	51			
1		90	81	77	72	69	66	87	79	76	71	68	65	74	70	67	64	65	64	60	58			
1.25		96	86	85	78	77	72	94	84	83	77	76	72	80	76	74	71	72	70	66	64			
1.5		102	89	91	82	83	77	98	88	89	82	82	76	85	80	79	75	77	74	71	69			
2		109	95	100	89	92	84	105	93	97	88	91	84	93	86	87	83	84	81	78	76			
2.5		113	98	105	93	99	89	109	96	103	92	97	88	98	90	93	87	89	86	83	81			
3		116	100	109	96	104	93	113	98	106	95	102	92	101	93	97	90	93	89	86	85			
4		120	102	115	99	110	97	116	101	111	98	107	96	105	96	102	94	97	92	90	88			
5		122	103	118	101	114	99	118	102	114	100	111	98	107	98	105	96	99	95	92	91			
10		127	106	124	105	122	104	122	105	120	104	118	103	113	102	111	101	105	99	97	95			

配光曲線 (cd/1000[lm])

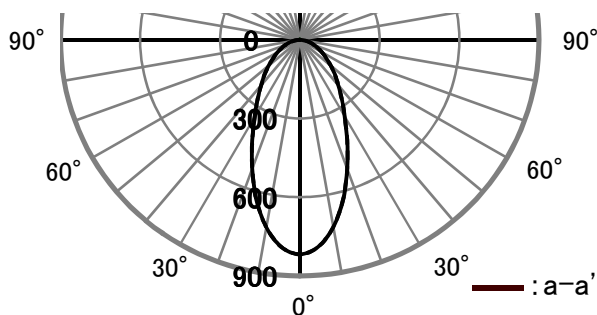

高さ(m) 直射水平面照度図 初期値

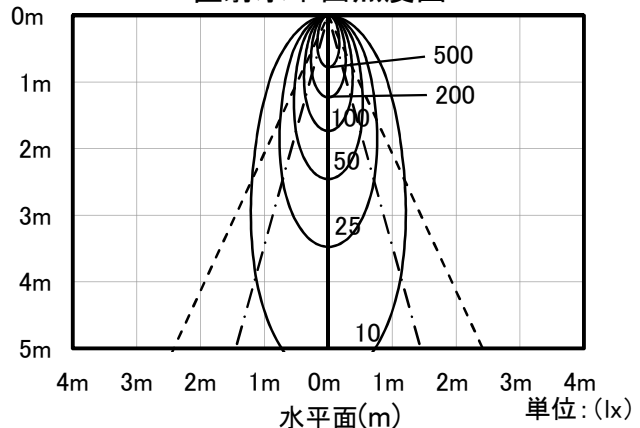

1/2ビーム角---	52°
1/2照度角 -.-	32°