


名称	LEDダウンライト 埋込穴φ125 調光非対応 電球色	
型名	EA5D-32-125W-27R1	
光源	型名	-
	全光束	- [lm] -
保守率	良い	0.63
	普通	0.60
	悪い	0.53
効率	上半球	0 [%]
	下半球	100 [%]
	全方向	100 [%]
器具光束	480 [lm]	

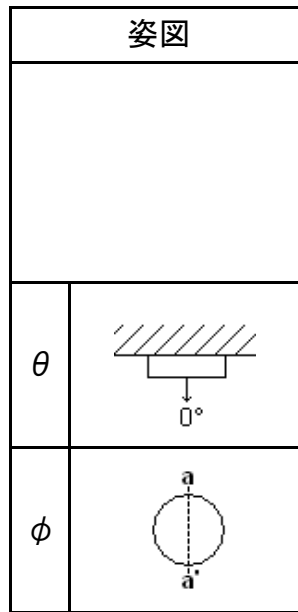


◎配光特性 [cd/1000lm]

θ	ϕ	a-a'	b-b'	c-c'
0°		838		
10°		742		
20°		529		
30°		338		
40°		221		
50°		148		
60°		98		
70°		58		
80°		21		
90°		0		
100°		0		
110°		0		
120°		0		
130°		0		
140°		0		
150°		0		
160°		0		
170°		0		
180°		0		


照明率表

反射率 (%)	天井						70						50				30		20	0	
	壁	70		50		30		70	50		30		50	30		30	10	0			
室指数	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
		照明率 (×0.01)																		初期値	
0.6	73	67	60	57	52	51	71	66	59	57	52	50	58	56	51	50	51	50	46	44	
0.8	82	75	70	65	61	59	80	74	69	65	61	59	67	64	60	58	59	57	53	52	
1	90	81	78	72	70	66	88	80	76	71	69	66	74	70	67	65	66	64	60	58	
1.25	97	86	85	78	77	72	94	85	84	77	76	72	80	76	74	71	72	70	66	65	
1.5	102	90	91	83	83	77	99	88	89	82	82	77	86	80	79	76	77	75	71	69	
2	109	95	100	89	93	85	106	93	98	88	91	84	93	86	88	83	85	82	78	77	
2.5	114	98	106	93	99	90	110	97	103	92	97	89	98	90	93	87	90	86	83	81	
3	117	100	110	96	104	93	113	99	107	95	102	92	101	93	97	91	93	89	87	85	
4	120	102	115	99	110	97	116	101	112	98	107	96	105	96	102	94	97	93	91	89	
5	123	104	118	101	114	99	118	102	114	100	111	98	108	98	105	97	100	95	93	91	
10	127	107	125	105	123	104	123	105	121	104	119	103	113	102	111	101	105	99	98	96	

配光曲線 (cd/1000[lm])

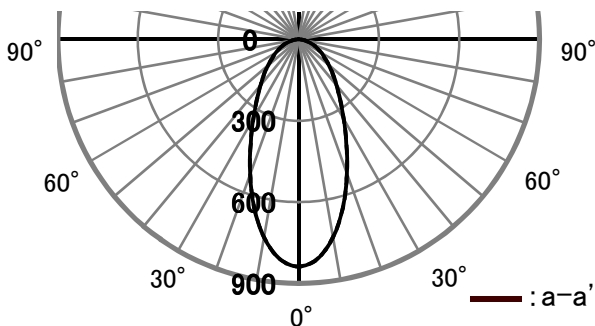

直射水平面照度図 初期値

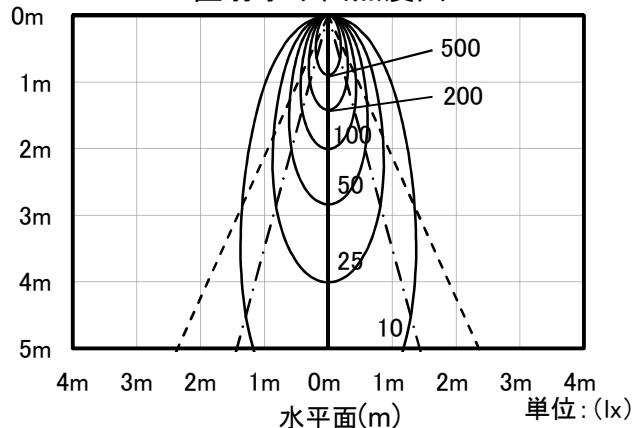

1/2ビーム角	---	50°
1/2照度角	- - -	32°